




Surextension
Capacité: 100 lbs /45.4kg
Installation: 12.7mm +0.25 mm ($\frac{1}{2}$ " + $\frac{1}{32}$ ")
Compatible système 32
Levier de détachement

Over extension
Load: 100 lbs /45.4kg
Installation: 12.7 mm +0.25 mm ($\frac{1}{2}$ " + $\frac{1}{32}$ ")
System 32 compatible
Trigger disconnect

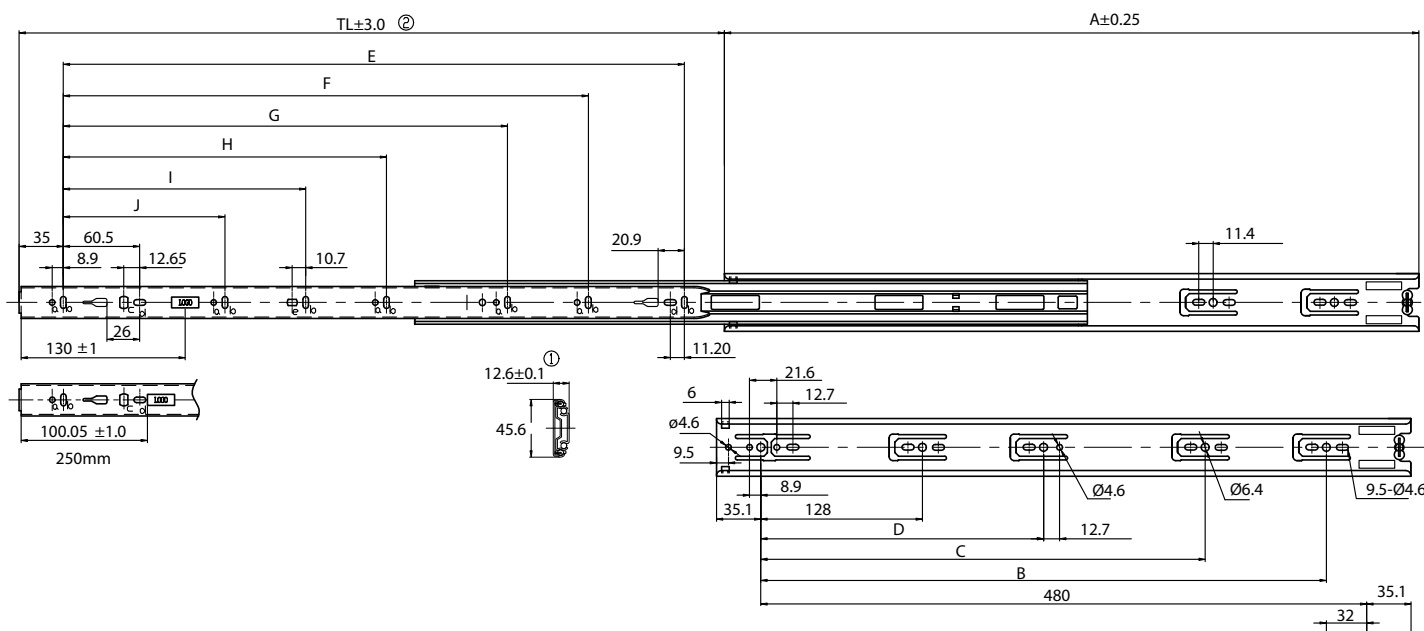

#	Dimensions		A	B	C	D	E	F	G	H	I	J	TL
COU-AFXE38-250MM	10"	250					192						279.4
COU-AFXE38-300MM	12"	300	128			224	242					128	330.2
COU-AFXE38-350MM	14"	350	128	306		224	298					128	380
COU-AFXE38-400MM	16"	400	128	320		224	342					128	431.8
COU-AFXE38-450MM	18"	450	128	352		224	392		320			128	482.6
COU-AFXE38-500MM	20"	500	128	416		224	442		320			128	534.2
COU-AFXE38-550MM	22"	550	128	325		224	492	416				128	584.2